


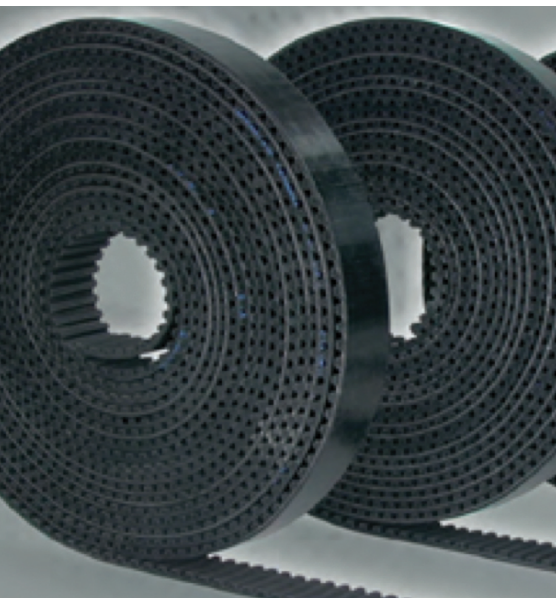

OPEN END SYNCHRONOUS

SINGLE SIDED TIMING BELT

- **Standard** – MXL, XL, L, H – Imperial Pitch
- **STD8** – Circular Side Tooth Profile
- **RPP** – 3M, 5M, 8M – High Torque
- **Silver3** – 3M, 5M, 8M, 14M – Extra High Torque
- **Gold2** – 8M, 14M – Super High Torque
- **Titanium** – 8M, 14M – Ultra High Torque - Carbon cord – HNBR compound

Rubber Open-End Synchronous Timing Belts are manufactured with high quality materials and a state of the art production process. Rubber Open-End Belts are especially suited for reversing drives and applications where rotational movement is transformed into linear motion and high positioning accuracy is required.

PART NOMENCLATURE

LXL025	LRPP5M20	LSLV38M15	LTTM14M37
L = Open-end belt	L = Open-end belt	L = Open-end belt	L = Open-end belt
XL = Tooth Pitch (1/5")	RPP = Parabolic Tooth Profile	SLV3 = Silver 3 construction	TTM = Titanium construction
025 = Belt Width (1/4")	5M = Tooth Pitch (5mm)	8M = Tooth Pitch (8mm)	14M = Tooth pitch (14mm)
	20 = Belt Width (20mm)	15 = Belt Width (15mm)	37 = Belt width (37mm)

TECHNICAL INFO

- Applications: Automatic garage doors, automatic sliding doors, X-Y tables on tooling machines, fitness machines, printers, linear positioning systems
- Engineering Standards: Conforms to ARPM standard IP-27 and ISO 13050
- Recommended Pulleys: Use pulleys made to ARPM or ISO 13050 standards

FEATURES & BENEFITS

- High positioning accuracy on reversing drives
- Able to cover a wide range of applications
- Low noise level due to vibration absorbing characteristic of rubber compound
- Maintenance free with long service life
- High flexibility and abrasion resistance
- Available in a wide variety of performance levels from low to ultra high torque drives

STANDARD ROLL LENGTHS (METERS)

Belt Type/ Width Code (inch)	025	031	037	050	075	100	150	200	300
	1/4"	5/16"	3/8"	1/2"	3/4"	1.0"	1.50"	2.0"	3.0"
MXL	160	130	110	-	-	-	-	-	-
XL	50	50	50	-	-	-	-	-	-
L	-	-	-	50	50	70	-	-	-
H	-	-	-	50	50	50	50	50	50

Belt Type/ Width Code (mm)	09	10	12	15	20	21	25	30	36	37	50	55	85
	9 mm	10 mm	12 mm	15 mm	20 mm	21 mm	25 mm	30 mm	36 mm	37 mm	50 mm	55 mm	85 mm
RPP3 - 3M	50	-	50	50	-	-	-	-	-	-	-	-	-
RPP5 - 5M	50	-	50	50	50	-	50	50	-	-	-	-	-
RPP8 - 8M	-	50	-	50	50	-	50	50	-	-	50	-	50
Silver3 - 3M	-	50	-	50	50	-	50	-	-	-	-	-	-
Silver3 - 5M	-	50	-	50	50	-	50	50	-	-	-	-	-
Silver3 - 8M	-	50	-	50	50	-	50	50	-	-	-	-	-
Titanium - 8M	-	50	50	50	-	50	50	50	50	-	-	-	-
Titanium - 14M	-	-	-	50	50	-	50	-	-	50	-	-	-
STD8 - 8M	-	50	40	45	50	-	50	-	-	-	-	-	-



WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov

Stock Items

All items subject to minimum order quantity requirements.

POWER TRANSMISSION

SYNCHRONOUS BELTS